
Reisopack Fusion

OPERATOR CYCLED
STRAPPING MACHINE FOR
UNIVERSAL APPLICATIONS

- Operator Cycled Entry Level Strapping Machine
- Standard 3 Heat-Weld Sealing Unit
- Up to 55 Bundles Per Minute
- Track Sizes Up To 1250 mm Wide
- Machine Options Available

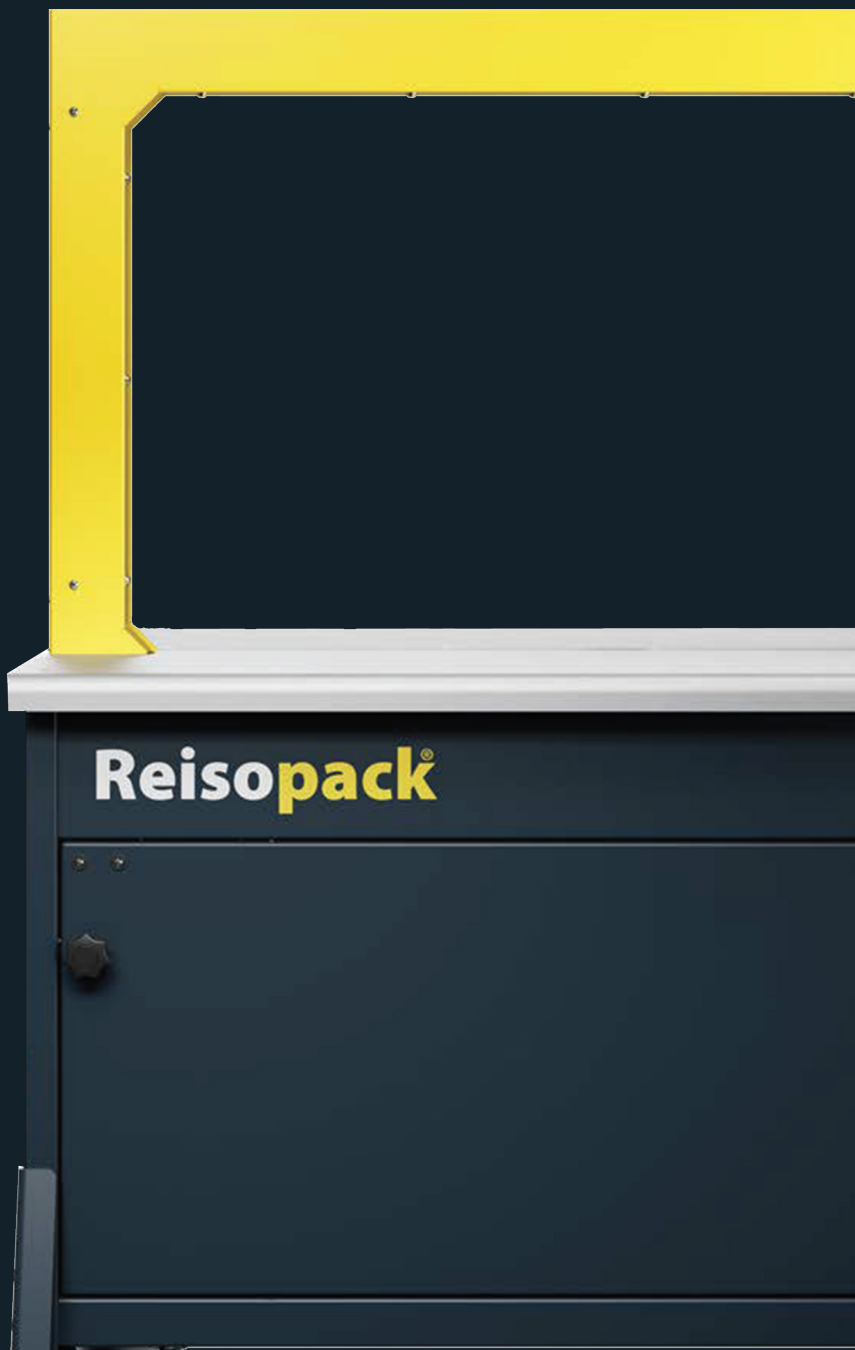

Reisopack

TECHNICAL SPECIFICATIONS

Production Rate
Up to 55 bundles per minute

Power Consumption
Approx. 0.2kW

Track Size
See chart below

Electrical
100 - 240 V, 50/60 Hz, 1L+N+PE

Strapping
PP strap from 5-12 mm

Strap Seal
Heat seal with DC brushless direct drive motor

Machine Shipping Weight
Approx. 529 Lbs. (240 kg)


SPECIAL FEATURES


+ Strap end detection with ejection of remaining strap
+ Easy strap coil change and threading system
+ Adjustable strap tension
+ 2 fixed castors, 2 lockable swivel castors

OPTIONS

+ Table extension to add up to 100 mm each side
+ E-Package:
  + Automatic strap release via light sensor
  + Selection of single or permanent strapping and strap tension control via light barrier
  + Three different strap tensions are explicitly storable by customer

	MACHINE ARCH SIZE					
	600 x 500		800 x 600		1250 x 600	
	Inches	mm	Inches	mm	Inches	mm
A	35	900	46.8	1190	64.5	1640
B	23.6	600	31.4	800	49	1250
C	19.6	500	23.6	600	23.6	600
D	54-58	1370-1475	57.8-62	1470-1575	57.8-62	1470-1575
E	43	1090	50.7	1290	68.5	1740

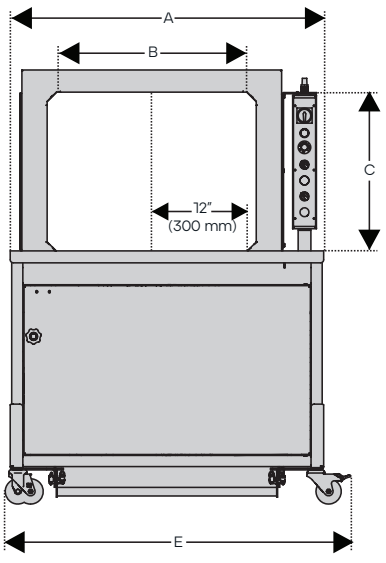

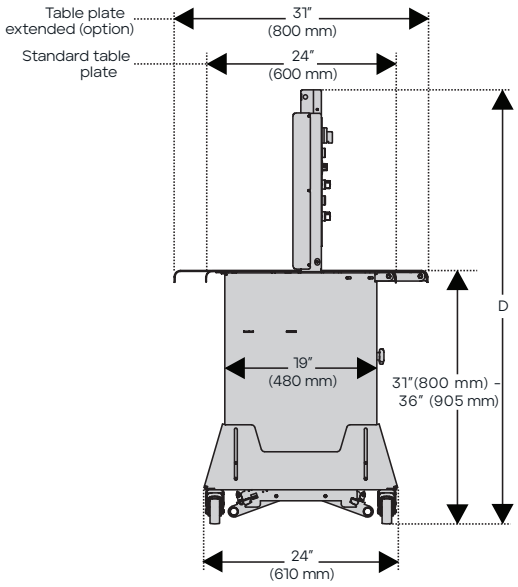

CONTACT US FOR A FREE CONSULTATION TODAY
www.eammosca.com | info@eammosca.com

U.S.A., Latin America & The Caribbean

EAM-Mosca Corporation
675 Jaycee Drive, Hazle Township, PA 18202
Phone: +1 800.456.3420 / +1 570.459.3426

Canada

EAM-Mosca Canada Ltd.
170 William Smith Drive, Whitby, Ontario, L1N 9N3
Phone: +1 800.633.6392 / +1 905.665.8225

©2026 EAM-Mosca Corporation. All Specifications Subject to Change Without Notice. 04/2026

Reisopack®