
KR519V
Transport Base

No other transport base matches the performance, versatility & ease of use!


Introducing the KR519V... Kirk-Rudy's latest innovation in product transport specifically designed for the newest high quality inkjet technology.

We completely redesigned our professional grade inkjet base to provide leading class print quality, durability and modularity. The KR519V is perfectly suited for handling all kinds of direct mail pieces as well as flat chipboard and corrugated cartons for your inkjet printing, coding and labeling needs. Unmatched in the number of available options the KR519V can easily be configured to match your needs to grow with your business. With four sided "T" slotted heavy duty extruded aluminum frames the mounting options are endless. The KR519V is modular to allow for quick and easy placement in-line with feeder, inserters, bindery lines and folders. For an even quicker no- tool setup time, add the hydralift option to the KR519V.

Shown with the optional KR496 friction feeder and mount and Wavejet inkjet printer.

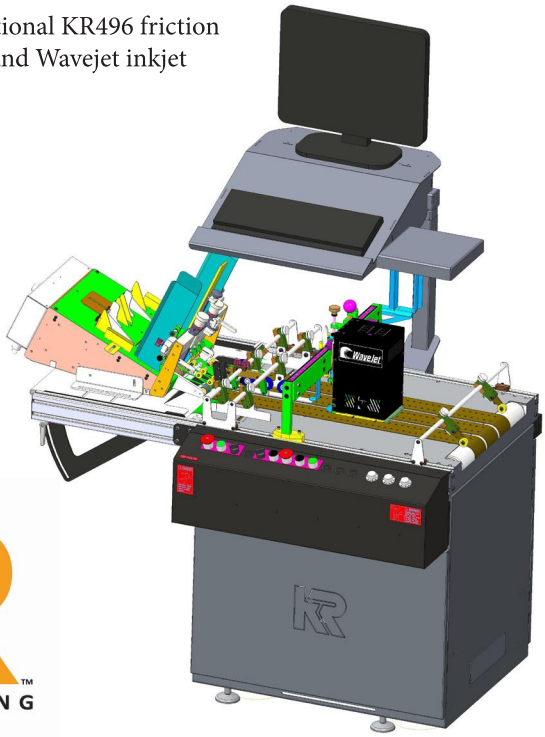

Shown with the optional infeed belt registration, camera verification, double detect and NetJet inkjet printer.

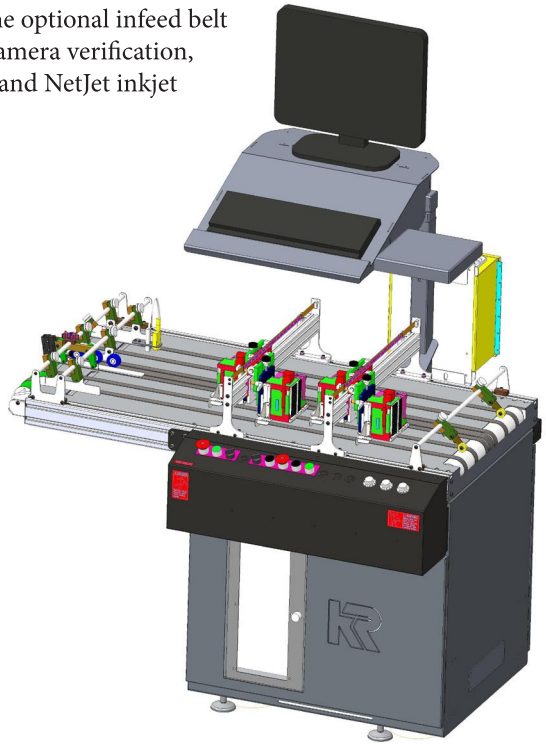

KR ENGINEERING™

770.427.4203 | kr-engineering.com | 125 Lorraine Parkway Woodstock, GA 30188

KR519V Transport Base

** General Specifications

Physical	English	Metric
Length	34”, 43”, 54”, 70”, 92”	86, 109, 137, 178, 234cm
Width	45”	114 cm
Height	33.25”	84.5 cm

Product

Materials	Minimum: 1.25” W (8.9 cm) 3” L (8.9 cm)	Maximum: 22” W (27.9 cm) 17” L (27.9 cm) 1” Thick (6.3 mm)

Electrical Requirements

Voltage	Amps	Phase	Hz
110 VAC Larger bases 220 VAC	20 30	1 1	50/60

Operating Speeds

Maximum	600 fpm (optional 1000 fpm)

Note:Speeds are dependent on material being fed
** Specifications subjet to change without notice


Features & Benefits

- Heavy duty extruded four sided T-slotted frames
- No tool setup
- Optimized encoder mount and drive
- 18” wide rollers improve product transfer
- Base mount motor reduces vibration
- Toothless belted drive system reduces vibration
- Torque limiting drive protects inkjet heads
- Stainless steel inkjet tabletop increases belt life
- Modular construction for maximum flexibility
- Infeed jam detect protects print head
- Pallet jack/fork lift base clearance
- Adjustable monitor/keyboard location
- Top side belt adjust
- Designed for quick and easy belt replacement
- Maintenance free drive
- Cabinet designed to maximize access


Options

- Divert
- Vacuum control configurations
- Feeder interface
- Conveyor interface with speed up
- Friction feeder mount with angle adjust
- Belted infeed registration
- Roller infeed registration
- Infeed double detect
- Hydra-lift (5” height adjust)
- Camera/Verification
- Right or left product flow
- .75”,1.25”,3”,10”,17” wide belts
- 30”,39”,50”,66”,88” print area
- Custom configurations per request

Shown with optional 50” print area, NetJet inkjet printer and KR839V divert.

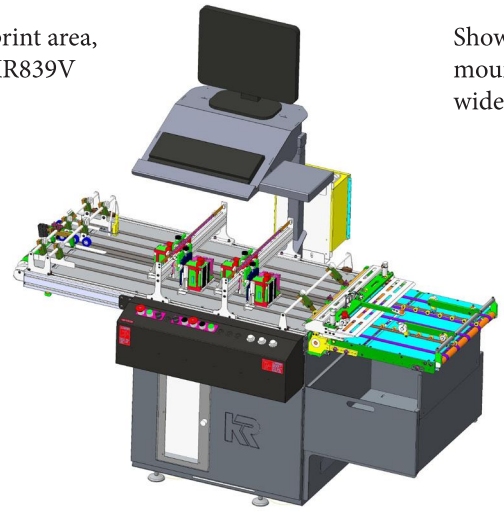

Shown with optional friction feeder and mount, Phoenix inkjet printer and 10” wide belt.

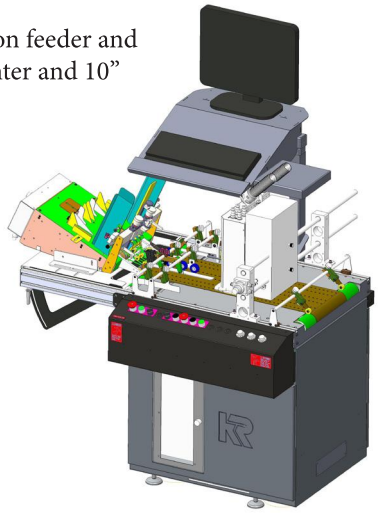

ENGINEERING

770.427.4203 | kr-engineering.com | 125 Lorraine Parkway Woodstock, GA 30188